


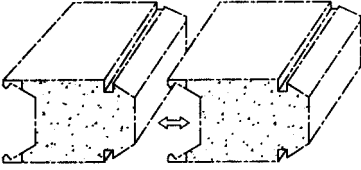
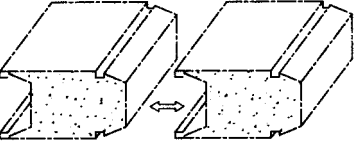
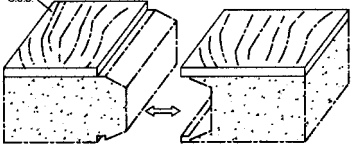
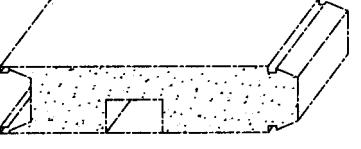
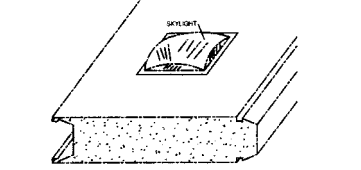
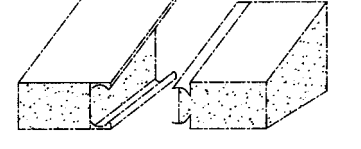













<b>ITEM</b>	<b>USE/DESCRIPTION</b>	<b>SPEC'S</b>
 <p><b>UNIVERSAL LOCK</b></p>	<p><b>INSULATED ROOF PANEL</b></p> <p>Roll lock or horizontal lock. Double sealant reservoir, internal drainage system, reinforced locking edges and interlock foam for consistent thermal separation. Will easily unlock if necessary.</p> <p>Aluminum facings both sides, fully engineered for 3", 4", 6" and 8" thicknesses.</p>	<p><b>Widths:</b> 4' or half width 22 7/8"</p> <p><b>Lengths:</b> up to 40'</p> <p><b>Color Selections:</b> White, Ivory, Bronze, Almond or Grey Aluminum</p>
 <p><b>ELITE INTERLOCK</b></p>	<p><b>INSULATED ROOF PANEL</b></p> <p>Easy interlock design. Positive Lock feature, interlock foam for consistent thermal separation, large internal drainage system. Expanded polystyrene core.</p> <p>Aluminum facings both sides, fully engineered for 3", 4", 6" and 8" thicknesses.</p>	<p><b>Widths:</b> 4' or half width 22 7/8"</p> <p><b>Lengths:</b> up to 40'</p> <p><b>Color Selections:</b> White, Ivory, Bronze, Almond or Grey Aluminum</p>
 <p><b>ELITE SHINGLE</b></p>	<p><b>INSULATED ROOF PANEL</b></p> <p>Specifically designed for the use of shingles or tile. Plywood or OSB top facing, for the application of other roof treatments conventionally. Must maintain a minimum slope of 2 1/2" per foot and be properly dried in. Enjoys all of the features and trim of Universal lock.</p>	<p><b>Widths:</b> 4' only</p> <p><b>Lengths:</b> up to 24'</p> <p><b>Thickness:</b> 4" Min., 6", 8"</p> <p><b>Color Selections:</b> White, Ivory, Bronze, Almond or Grey Aluminum</p>
 <p><b>CONCEALED FAN BEAM</b></p>	<p><b>INSULATED PANEL</b></p> <p>Available in any panel thickness when the attachment of a fan or light fixture is required. 2" X 3" concealed beam is used as a conduit and for connection integrity. Available with any style panel.</p>	<p><b>Widths:</b> 4' or half width 22 7/8"</p> <p><b>Lengths:</b> up to 40'</p> <p><b>Color Selections:</b> White, Ivory, Bronze, Almond or Grey Aluminum</p>
 <p><b>IN PANEL SKYLIGHT</b></p>	<p><b>INSULATED PANEL</b></p> <p>When skylights are desired. Panel is completely prepared, skylight and attachment kit are included. Available in 3", 4" &amp; 6" Elite panel. Double Domed Poly Carbonate.</p>	<p><b>Standard Size:</b> 2' X 4' 2' X 2', 2' X 6', Special Order</p> <p><b>Color:</b> Earthtone <b>Frame Color:</b> White, Bronze Min. panel length using skylight -6'</p>
 <p><b>ELITE DOUBLE FACED TAPERED</b></p>	<p><b>INSULATED ROOF PANEL</b></p> <p>Panel used when sidewalls can not be tapered for positive slope. Offers customer preferred flat ceiling and greater R-Value.</p>	<p><b>Widths:</b> 4' only</p> <p><b>Min. Lengths:</b> 8' <b>Max. Lengths:</b> 24' <b>Color Selections:</b> White, Ivory, Bronze, Almond or Grey Aluminum Starting Thickness 2", 1/4" per ft. slope only</p>











<b>ITEM</b>	<b>USE/DESCRIPTION</b>	<b>SPEC'S</b>
 <p><b>ELITE SINGLE FACED TAPERED</b></p>	<p><b>Overlay Panel for Flat Roofs</b></p> <p>Single layer application. Adds positive slope, concealed clip system for attachment, adds R-Value, eliminates removal of old roof</p>	<p><b>Widths:</b> 4' only</p> <p><b>Lengths:</b> up to 40'</p> <p><b>Color Selections:</b> White, Ivory, Bronze, Almond or Grey Aluminum</p> <p>Starting Thickness 2" 1/4" or 1/8" per ft. slope.</p>
 <p><b>ELITE POLY-DECK FLOOR PANEL</b></p>	<p><b>INSULATED FLOOR SYSTEM</b></p> <p>Panel used when a raised floor application is required. E.P.S. core is recessed to accept 2X4, 2X6 &amp; 2X8 lumber as connectors and perimeter finish. Specify standard panel or end panel.</p>	<p><b>Widths:</b> 4' or 2'</p> <p><b>Min. Lengths:</b> 8'</p> <p><b>Facing Options:</b> 7/16" O.S.B., Cement Board or Aluminum</p>
 <p><b>ELITE DOUBLE GUTTER</b></p>	<p><b>RAIN CARRYING SYSTEM</b></p> <p>Protects core material from possible damage. Allows moisture that may intrude the system to exit through a secondary gutter. Two piece hinge design for easy installation.</p>	<p><b>Widths:</b> for 3" &amp; 4" systems</p> <p><b>Lengths:</b> 24'</p> <p><b>Color Selections:</b> White or Bronze</p> <p>Splice Available</p>
 <p><b>ELITE "D" FASCIA</b></p>	<p><b>SIDE FASCIA</b></p> <p>Used only with Double Gutter. Protects core material from any possible damage. Blends aesthetically with double gutter.</p>	<p><b>Widths:</b> for 3" &amp; 4" systems</p> <p><b>Lengths:</b> 25'</p> <p><b>Color Selections:</b> White or Bronze</p>
 <p><b>ELITE "E" GUTTER</b></p>	<p><b>RAIN CARRYING SYSTEM</b></p> <p>Protects core material from possible damage. Allows flush finish on bottom side of roof.</p>	<p><b>Widths:</b> for 3" systems</p> <p><b>Lengths:</b> 24'</p> <p><b>Color Selections:</b> White, Bronze, Ivory or Almond</p> <p>Splice Available</p>
 <p><b>ELITE "E" FASCIA</b></p>	<p><b>SIDE FASCIA</b></p> <p>Used only with "E" Gutter. Protects core material from any possible damage. Blends aesthetically with "E" gutter.</p>	<p><b>Widths:</b> for 3' systems</p> <p><b>Lengths:</b> 25'</p> <p><b>Color Selections:</b> White, Bronze, Almond or Ivory</p>



<b>ITEM</b>	<b>USE/DESCRIPTION</b>	<b>SPEC'S</b>
 <p><b>NATURESCAPE 3 3/4" GUTTER</b></p>	<p><b>RAIN CARRYING SYSTEM</b></p> <p>Protects core material from possible damage. Can be used with 3" or 4" thick roof panels. Also allows for screening to eliminate debris.</p>	<p><b>Widths:</b> For 3" and 4" systems</p> <p><b>Length:</b> 24'</p> <p><b>Color Selections:</b> White and Almond</p>
 <p><b>NATURESCAPE 3 3/4" FASCIA</b></p>	<p><b>SIDE FASCIA</b></p> <p>Used only with NatureScape gutter. Protects core material from possible damage. Blends aesthetically with NatureScape gutter.</p>	<p><b>Widths:</b> For 3" and 4" systems</p> <p><b>Length:</b> 25'</p> <p><b>Color Selections:</b> White and Almond</p>
 <p><b>DRIP EDGE FASCIA</b></p>	<p>Extruded trim and closure for Elite Roof System, duplicates fascia and roof edge residential profile. Allows for the application of "K" style residential gutter.</p>	<p><b>Widths:</b> for 3", 4" &amp; 6" systems</p> <p><b>Lengths:</b> 25'</p> <p><b>Color Selections:</b> White, Almond &amp; Bronze</p> <p>For 6" systems -White only</p>
 <p><b>WALL HEADER</b></p>	<p>Channel used for attaching Elite panels to existing wall or fascia. Thermally broken for a constant separation between inside and outside surfaces. Pre-pitched for roof slope.</p>	<p><b>Lengths:</b> 24'</p> <p><b>Color Selections:</b> 3" White, Almond, Ivory &amp; Bronze</p> <p>4" &amp; 6" White, Almond &amp; Bronze</p>
 <p><b>ADJUSTABLE HEADER</b></p>	<p>Channel used for attaching Elite tapered panels to existing wall or fascia. Two piece design for easy adjustment to any dimension over 4".</p>	<p><b>Lengths:</b> 24'</p> <p><b>Color Selections:</b> White</p>
 <p><b>ADJUSTABLE RIDGE BEAM</b></p>	<p><b>ADJUSTABLE RIDGE BEAM</b></p> <p>Used to support load and connect panels at the ridge. Designed to achieve slopes of 1/12 to 7/12. Thermally broken for constant separation between outside and inside surfaces.</p>	<p><b>Widths:</b> 3", 4", 6" Roof system</p> <p><b>Lengths:</b> 24'</p> <p><b>Color Selections:</b> White and Almond</p>



<b>ITEM</b>	<b>USE/DESCRIPTION</b>	<b>SPEC'S</b>
 <p><b>GABLE RIDGE CONNECTOR</b></p>	<p>Used as panel connector on gabled roof. Designed for 3/12 slope. Thermally broken for a consistent separation between outside and inside surfaces.</p>	<p><b>Widths:</b> 3" System only</p> <p><b>Lengths:</b> 24'</p> <p><b>Color Selections:</b> White</p>
 <p><b>CONCEALED CLIP SYSTEM</b></p>	<p>Used on the single faced tapered panel system for attaching to an existing deck. Extruded aluminum. 2 piece system for easy adjustment to various panel thicknesses.</p>	<p>Set includes top &amp; bottom clip.</p> <p>Use bottom clip for end panels.</p> <p>Mill Finish</p>
 <p><b>BEAM/COLUMN</b></p>	<p>2 X 5, 2 X 7, 2 X 9 Carry Beam used in support structure. refer to Elite Master Plan for details.</p> <p>3 X 3 Column</p>	<p><b>Lengths:</b> 24'</p> <p><b>Color Selections:</b> White and Bronze</p>
 <p><b>LAG BOLT &amp; NEOPRENE WASHER</b></p>	<p>Used for anchoring against uplift on the Elite roof systems. Used at bearing and side walls.</p>	<p>4", 5" &amp; 8" lengths</p> <p>Lags 100 ct. Box3</p> <p>Neo-Washer 100 ct. Box</p>
 <p><b>URETHANE ADHESIVE</b></p>	<p>Used for the application of shingles and other type roof materials to the Elite roof.</p>	<p>11 oz. cartridge</p> <p>12 per carton</p>
 <p><b>ADHESIVE SEALANT- THERMO PLASTIC</b></p>	<p>Used for sealing seams and attachment connections. Industrial grade, adhesive quality.</p>	<p>11 oz. cartridge</p> <p>12 per carton</p> <p>White, Almond, Clear</p>
 <p><b>ADHESIVE SEALANT- THERMO PLASTIC</b></p>	<p>Used for sealing seams and other attachment connections. Industrial grade, adhesive quality, will not harm foam core.</p>	<p>11 oz. cartridge3</p> <p>12 per carton</p> <p>White only</p>
 <p><b>PEEL &amp; SEAL / ETERNABOND</b></p>	<p>Used for sealing seams and other attachment connections.</p> <p><b>Peel &amp; Seal:</b>Aluminum top facing on a mineral fiber substrate.</p> <p><b>Eternabond:</b>Pressure sensitive Multipolymer alloy film</p>	<p><b>Peel &amp; Seal:</b> 33.5 ft. Roll -3" &amp; 4" Widths White &amp; Almond embossed</p> <p><b>Eternabond:</b> 100 ft. Roll -2" &amp; 4" Widths White 2"-12/carton, 4" -6/carton</p>