




Cool Roof Colors

24 Gauge Galvalume Steel



BONE WHITE
SR .73 E .86 SRI 89




ALMOND
SR .57 E .86 SRI 67



SANDSTONE
SR .51 E .85 SRI 58



SIERRA TAN
SR .35 E .86 SRI 37



MANSARD BROWN
SR .30 E .85 SRI 30



MEDIUM BRONZE
SR .30 E .85 SRI 31



DARK BRONZE
SR .26 E .84 SRI 24



HARTFORD GREEN
SR .38 E .85 SRI 24



COLONIAL RED
SR .31 E .85 SRI 31




CITYSCAPE
SR .37 E .85 SRI 39



COPPER METALLIC
SR .49 E .85 SRI 55



BLACK
SR .25 E .86 SRI 24



POLYESTER WHITE
SR .37 E .85 SRI 39

The paper color chips on this page are as close as possible to the actual print color sample, but are not exact. For actual paint samples on metal, please contact Wrisco Industries. Fluropon and Fluropon Classic are registered trademarks of the Calspar Corporation.

www.wrisco.com | sales.staff@wrisco.com

ATLANTA DIVISION: 1116 Fleetwood Drive • Atlanta, GA 30316 • 800-753-1066
CHICAGO DIVISION: 6075 West 115th • Alsip, IL 60803 • 800-627-8036
DALLAS DIVISION: 12102 Corporate Drive • Dallas, TX 75228 • 800-627-8848
EDISON DIVISION: 21 Executive Avenue • Edison, NJ 08817 • 800-753-9400

SR: Solar Reflectance
E: Emittance
SRI: Solar Reflective Index


valspar

TECHNICAL DATA

Specular Gloss at 60° ASTM D 523 ²	Typical: 20-35
Pencil Hardness ASTM D 3363	HB to 2H
T-Bend ASTM D 4145 ⁵	1T to 3T ³ with no loss of adhesion
Cross Hatch Adhesion ASTM D 3359	No loss of adhesion
Reverse Impact ASTM D 2794 ⁵	Galvalume® or HDG: 2x ³ metal thickness inch-pounds, no loss of adhesion Aluminum: 1.5x metal thickness inch-pounds, no loss of adhesion
Humidity Resistance 100% RH 2,000 Hours ASTM D 2247 100% RH 3,000 Hours ASTM D 2247	Galvalume® or HDG: No field blisters Aluminum: No field blisters
Salt Spray Resistance 1,000 Hours ASTM B 117 3,000 Hours ASTM B 117	Galvalume® or HDG: Creep from scribe no more than 1/16" (2mm), no field blisters Aluminum: Creep from scribe no more than 1/16" (2mm), no field blisters
South Florida Exposure ASTM D 2244 ASTM D 4214	Color: No more than 5Δ Hunter units at 20 years Chalk: Rating no less than 8 at 20 years Film integrity: 20 years
Flame Test ASTM E 84	Class A coating
Water Immersion: 500° hours 100 F ASTM D 870	No loss of adhesion
Dew Cycle Weatherometer 1,000 hours ASTM D 3361	Color change: No more than 5Δ Hunter units Chalk: Rating no less than 8
Abrasion Resistance: ASTM D 968	65 ± 10 liters

FLUROPON® COATING SYSTEM

Fluropon is a two coat PVDF resin system with a total Dry Film Thickness (DFT) of 0.9 to 1.1 mils.

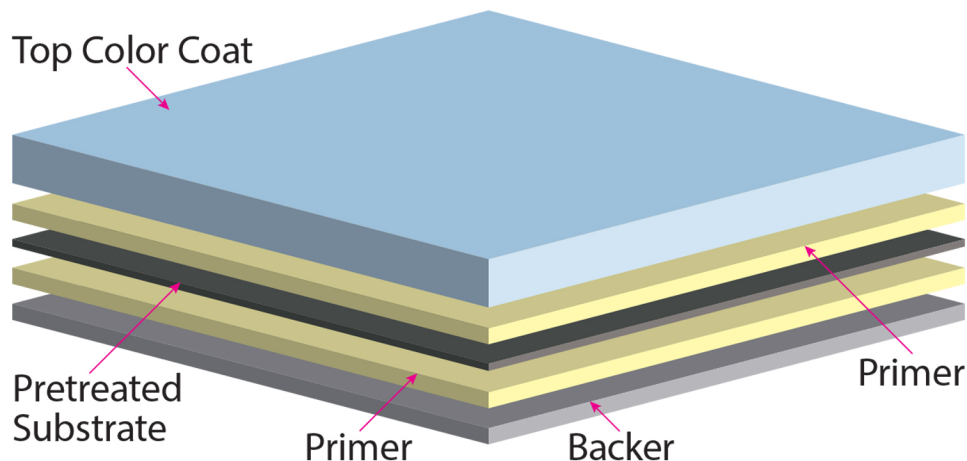

Top coat: 0.7 to 0.8 mils Primer: 0.2 to 0.3 mils
Backer: 0.3 to 0.4 mils